



PRIMO PREMIUM

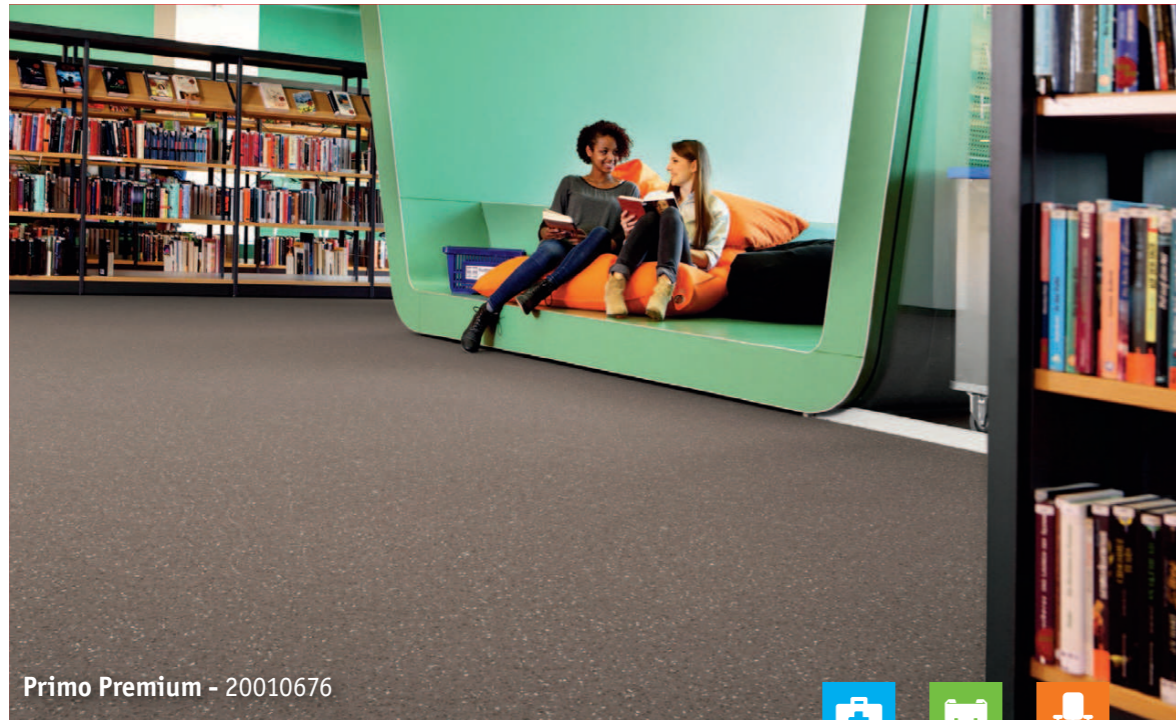


Primo Premium - 20010676

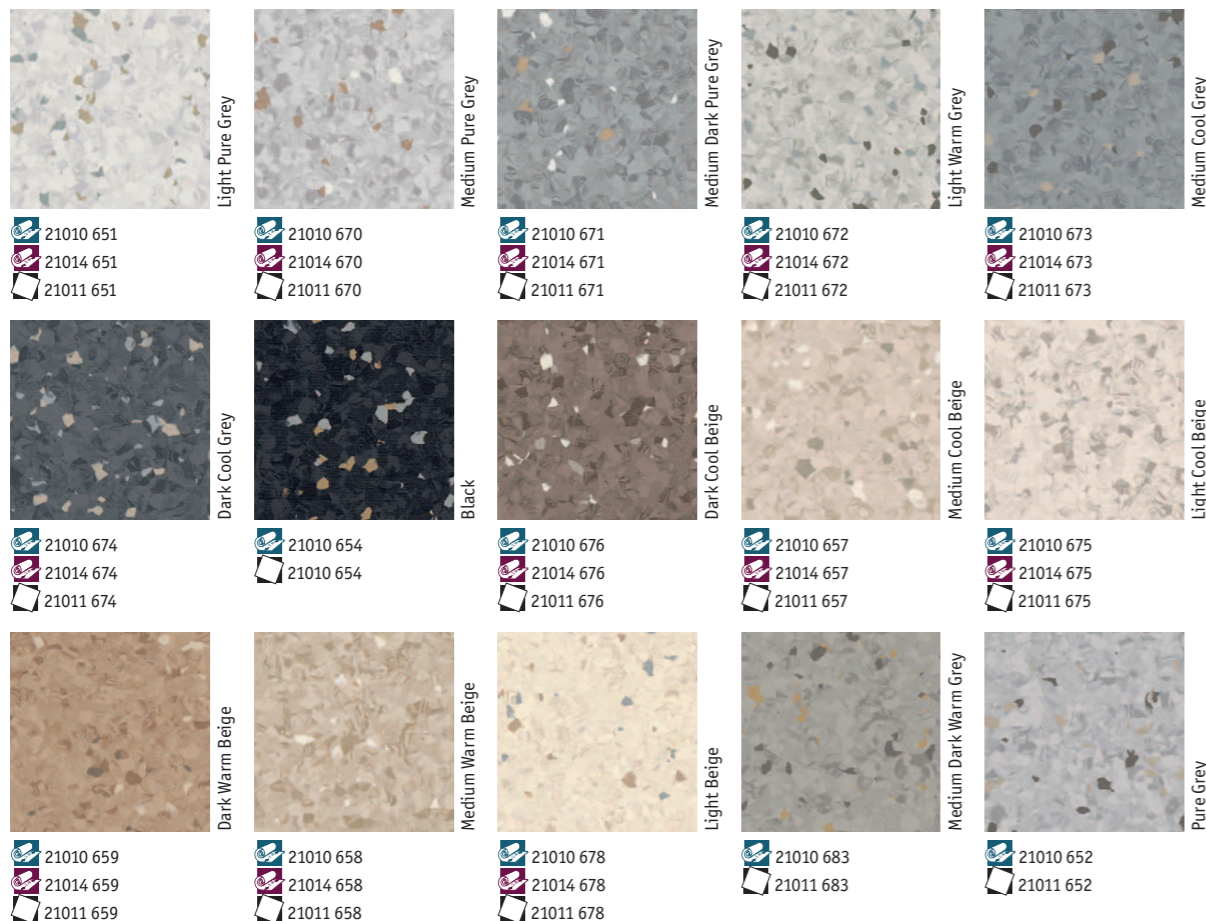

TECHNICAL DATA	STANDARDS	Primo Premium	Primo Acoustic
Classification			
Classification	ISO 10581 (EN 649) commercial industrial	Classes: 34 43	Classes: 34 42
UPEC Classification	UPEC Classification	U4 P3 E2/3 C2	U4 P3 E2/3 C2
	Impact sound reduction EN ISO 717/2	-	Approx. + 17dB
	Acoustic improvement NF S31-074	-	L _{n,eq} < 65dB Class A
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.00mm	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	2.00mm
Total weight	ISO 23997 (EN 430)	3 000g/m ²	3 600g/m ²
Surface treatment	-	PUR Reinforced Group P: ≤ 4.00mm ³	PUR Reinforced Group P: ≤ 4.00mm ³
Abrasion group	EN 660-2		
Technical performances			
Residual indentation	Average measured value	0.03mm	-
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	≤ 0.20mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B _n s1 ≥ 8 kW/m ² Pass	Class B _n s1 ≥ 8 kW/m ² Pass
	Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%
Castor wheel test	ISO 4918 (EN 425)	Suitable	Suitable
Static electrical charge	EN 1815	< 2kV	-
Light fastness	EN ISO 105-B02	≥ level 6	≥ level 6
Chemical resistance	ISO 846: Part C	Good resistance	Good resistance
Fungi and bacteria resistance	ISO 26987 (EN 423)	Does not favour growth	Does not favour growth
Clean room test	ISO 14644-1	Class 4	-
	ASTM F51/00	Class A	Class A
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	R9 ≥ 0.3
	Thermal resistance Underfloor heating	EN 12667 / DIN 52612	Approx. 0.01m ² K/W Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (05/2014). For more detailed technical information, please contact Tarkett.

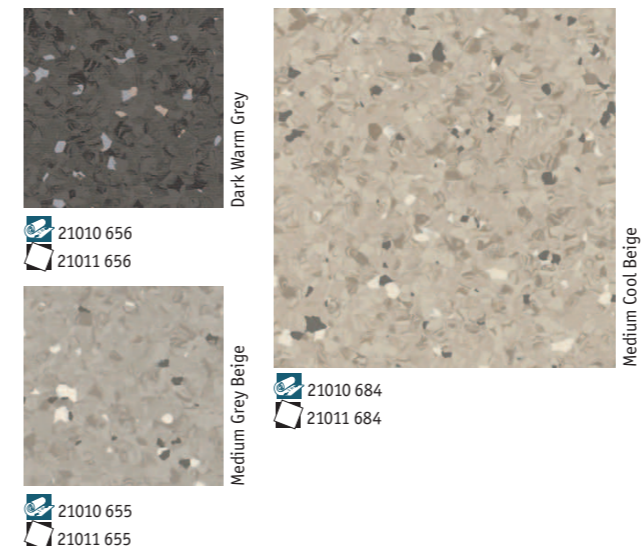

PRIMO PREMIUM

Main Product Features

- Multi-solution offer
- No additional surface treatment needed
- Flexible flooring solutions for perfect coving results and improved maintenance
- Extremely low VOC emissions
- Excellent life-cycle cost



Surface Treatment



Sustainability Tag



Logistics Information



General Information

