


# PRIMO SD




Primo SD - 21012 566

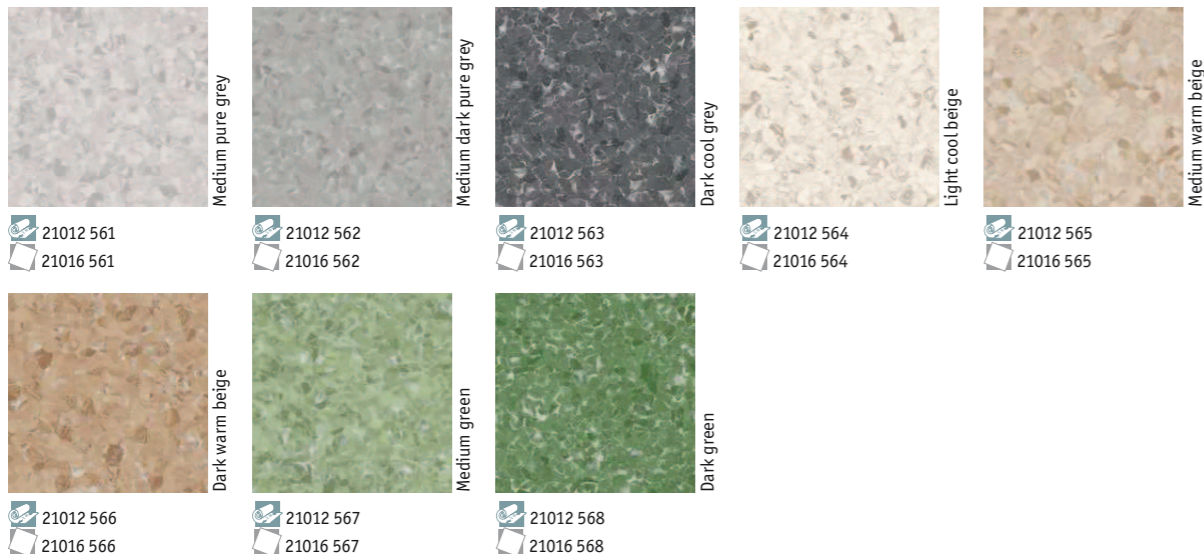

TECHNICAL DATA	STANDARDS	PrimoSD
<b>Classification</b>		
Classification	ISO 10582 (EN 649) - vinyl	Static dissipative pressed homogeneous vinyl flooring
	ISO 10581 (EN 649) - vinyl ISO 10874 (EN 685) - linoleum	Classes: - 34 43
	domestic commercial light industrial	
<b>Characteristics</b>		
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total thickness	ISO 24346 (EN 428)	2.00mm
Total weight	ISO 23997 (EN 430)	3 000g/m <sup>2</sup>
Flexibility	ISO 23344 (EN 435 Method A)	Pass
<b>Technical performances</b>		
Residual indentation	Average measured value	0.03mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	B <sub>s</sub> s1
	EN ISO 9239-1	≥ 8 kW/m <sup>2</sup>
	EN ISO 11925-2	Pass
Slip resistance	DIN 51130 EN 13893 BS 7976-2	R9 ≥ 0.3 Low risk of slip
	Dimensional stability	ISO 23999 (EN 434)
Castor chair test	ISO 4918 (EN 425)	Suitable
Thermal resistance Underfloor heating	EN ISO 10456 (EN 12524)	0.01m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02	≥ level 6
Abrasion group Volume loss	EN 660: Part 2	Group P: ≤ 4.0mm <sup>3</sup>
Electrical insulation	VDE 100, Part 600	R <sub>i</sub> ≥ 5x10 <sup>4</sup> Ω
Static electrical charge	EN 1815	< 2kV
Electrical resistance	ESD-approval SP-method 2472 EN 1081	R <sub>i</sub> ≤ 10 <sup>8</sup> ohms
	EN/IEC 61340-4-1 EN/IEC 61340-4-5	
Chemical resistance	ISO 26987 (EN 423)	Good resistance
Fungi and bacteria resistance	DIN EN 846 part C	Does not favour growth
Underfloor heating	-	Suitable - max 27°C

The above information is subject to modifications for the benefit of further improvement (05/2014). For more detailed technical information, please contact Tarkett.

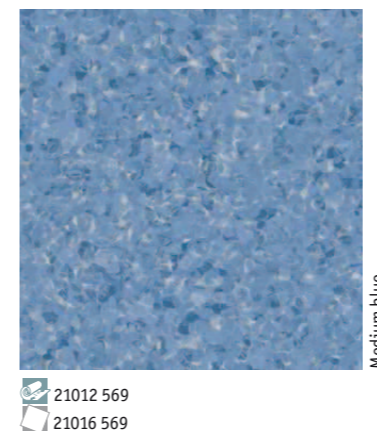

# PRIMO SD

## Main Product Features

- Economical ESD protection
- Electrical resistance of R ≤ 10<sup>8</sup> Ohms
- 9 versatile colours available both in sheets and tiles
- Colour-coordinated with Primo Premium and Eclipse Premium

## Surface Treatment



## Sustainability Tag



## Logistics Information

Available in rolls  
Rolls length: 231m  
Laying direction:

Available in tiles  
Laying direction:



Play with the Room Designer